



SZABO SCANDIC

Part of Europa Biosite

Produktinformation



Forschungsprodukte & Biochemikalien



Zellkultur & Verbrauchsmaterial



Diagnostik & molekulare Diagnostik



Laborgeräte & Service

Weitere Information auf den folgenden Seiten!
See the following pages for more information!



Lieferung & Zahlungsart

siehe unsere [Liefer- und Versandbedingungen](#)

Zuschläge

- Mindermengenzuschlag
- Trockeneiszuschlag
- Gefahrgutzuschlag
- Expressversand

SZABO-SCANDIC HandelsgmbH

Quellenstraße 110, A-1100 Wien

T. +43(0)1 489 3961-0

F. +43(0)1 489 3961-7

mail@szabo-scandic.com

www.szabo-scandic.com

[linkedin.com/company/szaboscandic](https://www.linkedin.com/company/szaboscandic) 

Axygen® Automation Tips for Hamilton Microlab® Prep™, STAR™ Line, NIMBUS®, and VANTAGE® Liquid Handling Workstations

96-well and 384-well Tips





1000 µL, 300 µL, 50 µL, and
10 µL tips

Now there is an alternative source for precision pipet tips compatible with Hamilton automated liquid handling workstations. Corning has a full line of Axygen brand conductive liquid level sensing tips in 4 sizes: 10 µL, 50 µL, 300 µL, and 1000 µL to accommodate any scientist's application. Tips are packaged in both hanging tip rack and nested stacked tip racks. As with all Axygen brand robotic tips, they are manufactured to stringent specifications under strict process controls and assembled via automation to ensure consistent performance and quality. Hanging tip rack format products are compatible with Hamilton Microlab Prep, STAR, STARlet, STARplus, NIMBUS, and VANTAGE workstations.

Features and Benefits

- ▶ The broadest line of tip sizes and styles in the industry
- ▶ Unique product choices which are not available from other manufacturers
- ▶ Tips engineered to function optimally with no hardware or software adjustments
- ▶ In-house engineering and mold-building/maintenance ensures quality products and a quick customer response
- ▶ Robust QC system and ISO certification ensures consistent quality and performance
- ▶ All tips are customer-validated prior to release ensuring advertised compatibility

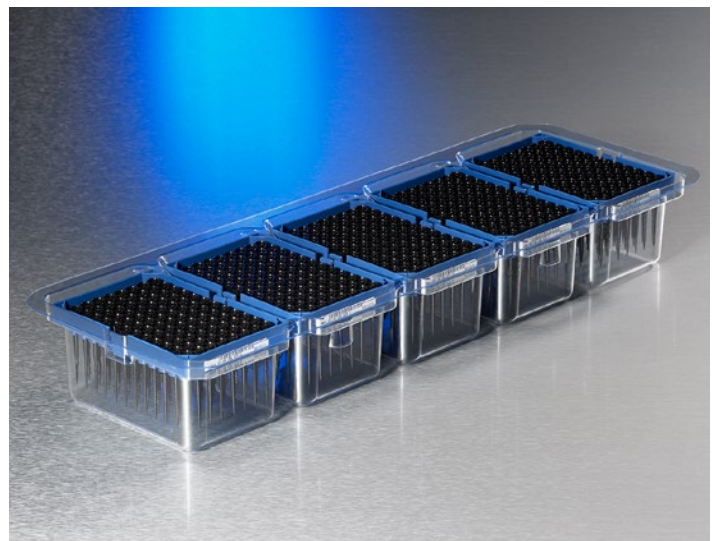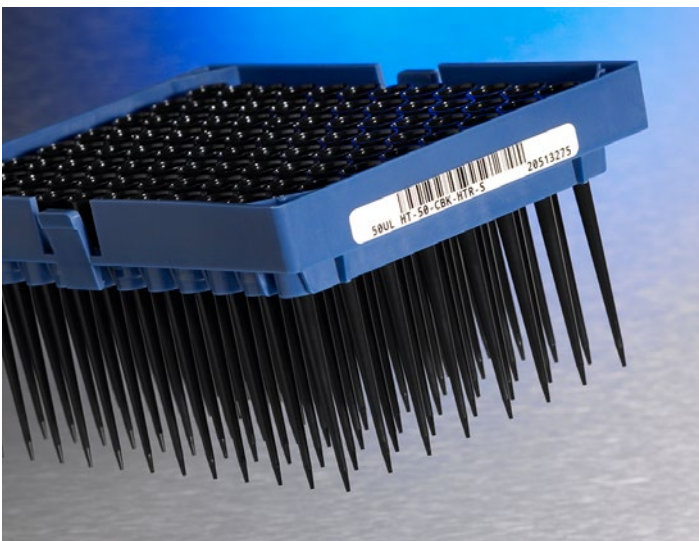


Hamilton®, Microlab®, NIMBUS®, and VANTAGE® are registered trademarks of Hamilton Company. CO-RE™, Prep™, STAR™, STARlet™, and STARplus™ are trademarks of Hamilton Company. The compatibility of Axygen tip products with Hamilton Company products has been independently determined by Corning; however, there should be no implication of sponsorship or endorsement by Hamilton Company of Axygen tip products.

96-well Format Axygen® Automation Tips Compatible with Hamilton Microlab® Prep™, STAR™ Line, NIMBUS®, and VANTAGE®

96-well format tips are offered in 2 rack formats: hanging and nested 4 stack.

1. Hanging Format





Format: 96 tip

- ▶ Tip volume range selection: 10 µL to 1000 µL
- ▶ Material: clear or conductive black polypropylene
- ▶ RNase-/DNase-free
- ▶ Nonpyrogenic

Available Options:

- ▶ With or without aerosol-resistant filters
- ▶ Nonsterile or sterile
- ▶ Rack format: Hanging tip rack
- ▶ Material: Number 5 Polypropylene

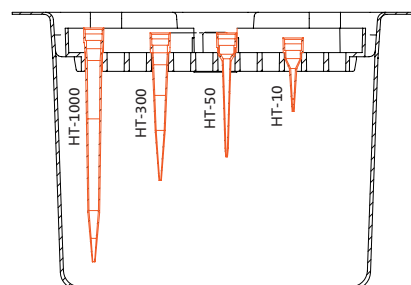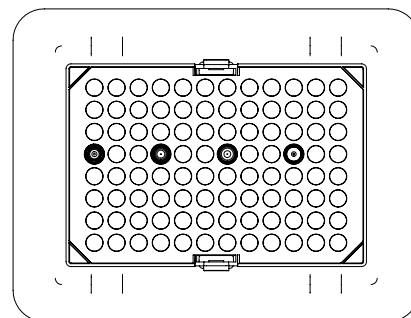

Ordering Information

96-well Axygen Hanging Format Automation Tips Compatible with Hamilton Microlab Prep, STAR Line, Nimbus, and VANTAGE

Conductive Black

Cat. No.	Description	Qty/Pk	Qty/Cs
HT-10-CBK-HTR	10 µL liquid level sensing automation tip	96	2,304
HT-10-CBK-HTR-5	10 µL liquid level sensing automation tip	480	5,760
HT-10-CBK-HTR-S-5	10 µL liquid level sensing automation tip, sterile	480	5,760
HTF-10-CBK-HTR-S-5	10 µL liquid level sensing filtered automation tip, sterile	96	2,304
HTF-10-CBK-HTR-S-5	10 µL liquid level sensing filtered automation tip, sterile	480	5,760
HT-50-CBK-HTR	50 µL liquid level sensing automation tip	96	2,304
HT-50-CBK-HTR-5	50 µL liquid level sensing automation tip	480	5,760
HT-50-CBK-HTR-S-5	50 µL liquid level sensing automation tip, sterile	480	5,760
HTF-50-CBK-HTR-S-5	50 µL liquid level sensing filtered automation tip, sterile	96	2,304
HTF-50-CBK-HTR-S-5	50 µL liquid level sensing filtered automation tip, sterile	480	5,760
HT-300-CBK-HTR	300 µL liquid level sensing automation tip	96	2,304
HT-300-CBK-HTR-5	300 µL liquid level sensing automation tip	480	5,760
HT-300-CBK-HTR-S-5	300 µL liquid level sensing automation tip, sterile	96	2,304
HT-300-CBK-HTR-S-5	300 µL liquid level sensing automation tip, sterile	480	5,760
HTF-300-CBK-HTR-S-5	300 µL liquid level sensing filtered automation tip, sterile	96	2,304
HTF-300-CBK-HTR-S-5	300 µL liquid level sensing filtered automation tip, sterile	480	5,760
HT-1000-CBK-HTR-5	1000 µL liquid level sensing automation tip	480	3,840
HT-1000-CBK-HTR-S-5	1000 µL liquid level sensing automation tip, sterile	96	1,536
HT-1000-CBK-HTR-S-5	1000 µL liquid level sensing automation tip, sterile	480	3,840
HTF-1000-CBK-HTR-5	1000 µL liquid level sensing filtered automation tip	480	3,840
HTF-1000-CBK-HTR-S-5	1000 µL liquid level sensing filtered automation tip, sterile	96	1,536
HTF-1000-CBK-HTR-S-5	1000 µL liquid level sensing filtered automation tip, sterile	480	3,840

96-well Oxygen[®] Hanging Format Automation Tips Compatible with Hamilton Microlab[®] Prep[™], STAR[™] Line, Nimbus[®], and VANTAGE[®] (Continued)

Clear

Cat. No.	Description	Qty/Pk	Qty/Cs
HT-10-C-HTR-5	10 µL automation tip	480	5,760
HT-10-C-HTR-S-5	10 µL automation tip, sterile	480	5,760
HTF-10-C-HTR-S-5	10 µL filtered automation tip, sterile	480	5,760
HT-50-C-HTR-5	50 µL automation tip	480	5,760
HT-50-C-HTR-S-5	50 µL automation tip, sterile	480	5,760
HTF-50-C-HTR-S-5	50 µL filtered automation tip, sterile	480	5,760
HT-300-C-HTR-5	300 µL automation tip	480	5,760
HT-300-C-HTR-S-5	300 µL automation tip, sterile	480	5,760
HTF-300-C-HTR-S	300 µL filtered automation tip, sterile	96	2,304
HTF-300-C-HTR-S-5	300 µL filtered automation tip, sterile	480	5,760
HT-1000-C-HTR-5	1000 µL automation tip	480	3,840
HT-1000-C-HTR-S-5	1000 µL automation tip, sterile	480	3,840
HTF-1000-C-HTR-S	1000 µL filtered automation tip, sterile	96	2,304
HTF-1000-C-HTR-S-5	1000 µL filtered automation tip, sterile	480	3,840

2. Nested 4 Stack





Format: 96 tip

- ▶ Tip volume range selection: 10 µL to 300 µL
- ▶ Material: clear or conductive black polypropylene
- ▶ RNase-/DNase-free
- ▶ Nonpyrogenic

Available Options

- ▶ With or without aerosol-resistant filters
- ▶ Nonsterile or sterile
- ▶ Rack format: “Nested tip rack”
- ▶ Material: Number 5 High-Polypropylene

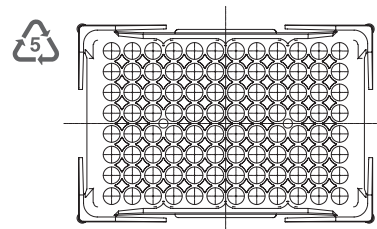

Ordering Information

96-well Oxygen Nested 4 Stack Format Automation Tips Compatible with Hamilton Microlab Prep, STAR Line, Nimbus, and VANTAGE

Conductive Black

Cat. No	Description	Qty/Pk	Qty/Cs
HT-10-CBK-STK	10 µL liquid level sensing automation tip	384	11,520
HT-10-CBK-STK-S	10 µL liquid level sensing automation tip, sterile	384	11,520
HT-50-CBK-STK	50 µL liquid level sensing automation tip	384	11,520
HT-50-CBK-STK-S	50 µL liquid level sensing automation tip, sterile	384	11,520
HT-300-CBK-STK	300 µL liquid level sensing automation tip	384	11,520
HT-300-CBK-STK-S	300 µL liquid level sensing automation tip, sterile	384	11,520

Clear

HT-10-C-STK	10 µL automation tip	384	11,520
HT-10-C-STK-S	10 µL automation tip, sterile	384	11,520
HT-50-C-STK	50 µL automation tip	384	11,520
HT-50-C-STK-S	50 µL automation tip, sterile	384	11,520
HT-300-C-STK	300 µL automation tip	384	11,520
HT-300-C-STK-S	300 µL automation tip, sterile	384	11,520


384-well Format Axygen® Automation Tips Compatible with Hamilton Microlab® Prep™, STAR™ Line, Nimbus®, and VANTAGE®

Format: 384 tip

- ▶ Tip volume range selection: 25 µL to 50 µL
- ▶ Material: clear polypropylene
- ▶ RNase-/DNase-free
- ▶ Nonpyrogenic

Available Options

- ▶ With or without aerosol-resistant filters
- ▶ Nonsterile or sterile
- ▶ Standard or Axygen Maxymum Recovery®
- ▶ Material: Conductive polypropylene racks for static dissipation

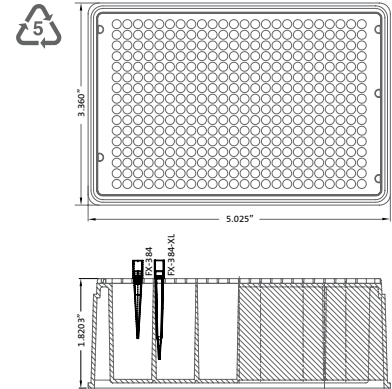

Ordering Information

384-well Axygen Automation Tips Compatible with Hamilton MICROLAB Microlab Prep, STAR Line, Nimbus, and VANTAGE



FX-384-XL-R; FX-384-XL-L-R;
FX-384-XL-R-S; FX-384-XL-L-R-S



FXF-384-XL-R-S; FXF-384-XL-L-R-S



FX-384-R; FX-384-L-R; FX-384-R-S;
FX-384-L-R-S



FXF-384-L-R-S



FX-384-45FP-R

*Images not to scale

Cat. No	Description	Qty/Pk	Qty/Cs
FX-384-XL-R	50 µL clear extra long tip	3,840	19,200
FX-384-XL-R-S	50 µL clear extra long tip, sterile	3,840	19,200
FXF-384-XL-R-S	50 µL clear extra long filter tip, sterile	3,840	19,200
FX-384-XL-L-R	50 µL Maxymum Recovery clear extra long tip	3,840	19,200
FX-384-XL-L-R-S	50 µL Maxymum Recovery clear extra long tip, sterile	3,840	19,200
FXF-384-XL-L-R-S	50 µL Maxymum Recovery clear extra long filter tip, sterile	3,840	19,200
FX-384-R	30 µL clear tip	3,840	19,200
FX-384-R-S	30 µL clear tip, sterile	3,840	19,200
FX-384-L-R	30 µL Maxymum Recovery clear tip	3,840	19,200
FX-384-L-R-S	30 µL Maxymum Recovery clear tip, sterile	3,840	19,200
FXF-384-L-R-S	30 µL Maxymum Recovery clear filter tip, sterile	3,840	19,200
FX-384-30FP-R	30 µL clear fine point tip	3,840	19,200
FX-384-30FP-R-S	30 µL clear fine point tip, sterile	3,840	19,200
FXF-384-30FP-R-S	30 µL clear fine point tip, filtered, sterile	3,840	19,200
FX-384-45FP-R	45 µL clear fine point tip	3,840	19,200

Hamilton®, Microlab®, NIMBUS®, and VANTAGE® are registered trademarks of Hamilton Company. CO-RE™, Prep™, STAR™, STARlet™, and STARplus™ are trademarks of Hamilton Company. The compatibility of Axygen tip products with Hamilton Company products has been independently determined by Corning; however, there should be no implication of sponsorship or endorsement by Hamilton Company of Axygen tip products.

For more specific information on claims, visit www.corning.com/certificates.

Warranty/Disclaimer: Unless otherwise specified, all products are for research use or general laboratory use only. Not intended for use in diagnostic or therapeutic procedures. These products are not intended to mitigate the presence of microorganisms on surfaces or in the environment, where such organisms can be deleterious to humans or the environment. Corning Life Sciences makes no claims regarding the performance of these products for clinical or diagnostic applications.

CORNING

Corning Incorporated
Life Sciences

www.corning.com/lifesciences

NORTH AMERICA

t 800.492.1110
t 978.442.2200

ASIA/PACIFIC

Australia/New Zealand
t 61 427286832

Chinese Mainland
t 86 21 3338 4338

India

t 91 124 4604000

Japan

t 81 3-3586 1996

Korea

t 82 2-796-9500

Singapore

t 65 6572-9740

Taiwan

t 886 2-2716-0338

EUROPE

CSEurope@corning.com

France

t 0800 916 882

Germany

t 0800 101 1153

The Netherlands

t 020 655 79 28

United Kingdom

t 0800 376 8660

All Other European Countries

t +31 (0) 206 59 60 51

LATIN AMERICA

grupoLA@corning.com

Brazil

t 55 (11) 3089-7400

Mexico

t (52-81) 8158-8400